


NGTC-16140PWR2

The NGTC-16140PWR2 is a Dante™ enabled digital bridgeable power amplifier for the nexgentec™ audio distribution solution.

The nexgentec™ DSP super modules enable efficient design and deployment of the NGTC audio network system, featuring the highest levels of functionality and performance.

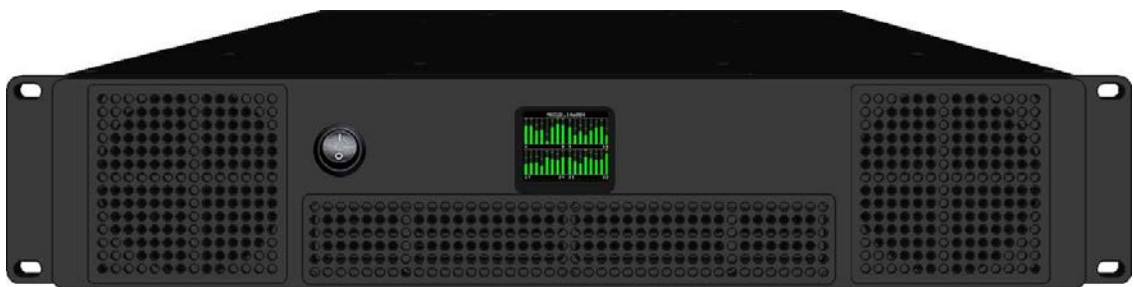

Key Features

- 16 x 280 W - 4 Ω / Ch 1% THD
- 16 x 140 W - 8 Ω / Ch 1% THD
- 2 kW wide range power supply
- 44.1 kHz / 48 kHz
- Control interface
- Web UI for monitoring and configuration
- SNMP
- Bridgeable: 500 W - 8 Ω

Power and Dimensions

Operating Power:	90 - 264 VAC 50 / 60 Hz – 10 A
Inrush Current:	50 A max
BTU Rating Idle:	230 BTU / hr
BTU Rating 1/8 Power @ 4 Ω :	595 BTU / hr
Operation Temperature Range:	0° to 40°C
Dimensions (H x W x D):	88.9 mm (2 U) x 482.6 mm (19 inch) x 421.3 mm
Weight:	13 kg