


NGTC-BTIR2 AES67 Bluetooth® Interface

The NGTC-BTIR2 is a universal Bluetooth® AES67 enabled audio interface for the nexgentec™ audio distribution solution.

The NGTC-BTIR2 features an API for navigation, configuration and management of the BT interface.

The nexgentec™ DSP super modules enable efficient design and deployment of NGTC audio network system featuring the highest levels of functionality and performance.

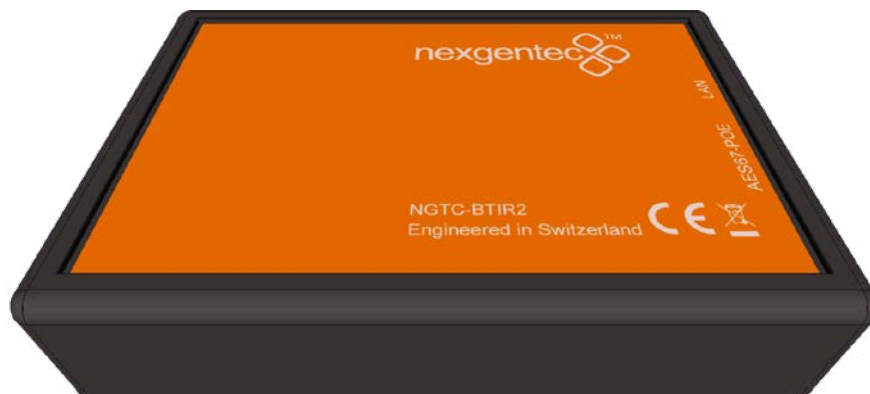

Key Features

- Supports android, iOS, PC, MAC devices
- Bluetooth® V5 down to V1.1, class 1.5
- 2.402 - 2.480 GHz
- Supports all audio formats
- LAN API interface
- Management API
- LAN AES67 audio port
- PoE powered

Power and Dimensions

Mains Voltage:	PoE
Power Consumption:	3 W
BTU Rating:	10
Operation Temperature Range:	5° to 30°C
Dimensions (H x W x D):	110 mm x 74 mm x 25 mm
Weight:	< 0.1 kg