



10BP-IG-8ohm



Robust Subwoofer

## Outdoor Burial Subwoofer

---

### Description

10BP-IG-8ohm is an all-weather, in-ground compact subwoofer, featuring a high power 10" long throw all weather low frequency transducer in a band-pass composite roto-mold enclosure. The 10BP-IG-8ohm Subwoofer delivers the punch, impact and clean tight bass necessary for outdoor installations.


The 10BP-IG-8ohm is designed to be the perfect companion to our line of high definition ribbon based outdoor loudspeakers, delivering the ultimate in high output, high definition low frequency reinforcement for any outdoor environment. Backyard landscapes, patio and pool areas will come alive with unparalleled clarity and detailed sound, engineered to give you years of listening satisfaction and pleasure.

---

### Features

- 10" Band-Pass In-Ground Subwoofer
- Robust Composite Roto-Mold Enclosure IP-65 per IEC529
- 10" 300W Long Throw Woofer
- Waterproof Composite Cone
- Large Rubber Surround
- 9.4" (24cm) Diameter, Textured Power-Coated Aluminum Dome Canopy
- Recessed Waterproof Strain Relief Pocket
- Convenient Handles

## Specifications

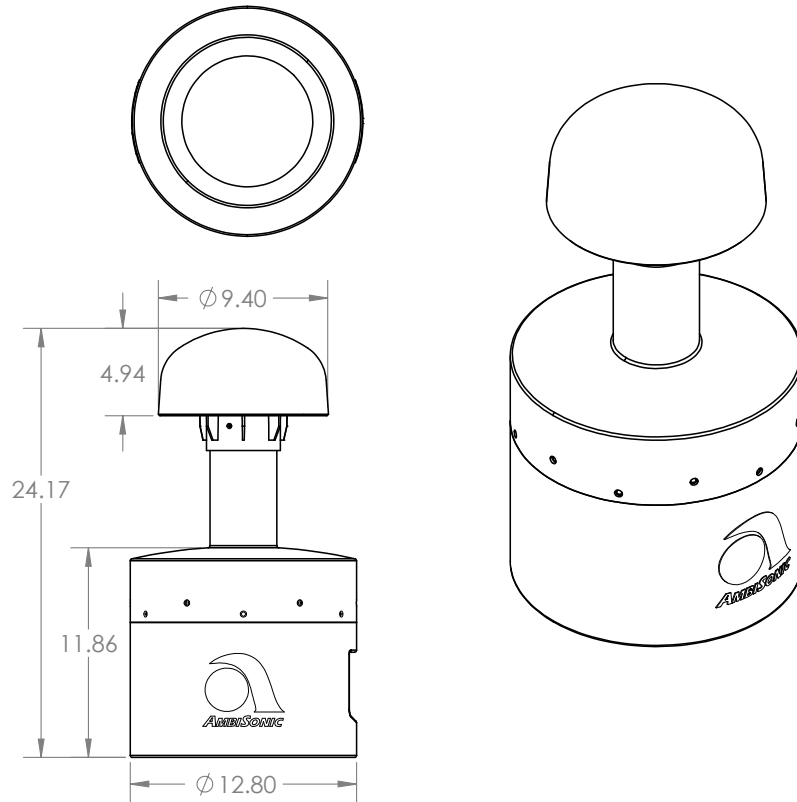

|                             |   |
|-----------------------------|---|
| System Type                 | Compact Band-Pass In-Ground Subwoofer with 9.4" (24cm) Canopy |
| Driver Components           | 10" Composite Cone All Weather Woofer                         |
| Crossover                   | DSP LPF 80Hz - 120Hz  |
| Frequency Range/ Response   | 32Hz - 200Hz   39 - 200Hz +/- 3dB                             |
| Maximum SPL @ 1m            | 117dB Continuous, 122dB Peak                                  |
| Sensitivity, 2.83V @ 1m     | 93dB  |
| Power Handling              | 300W RMS, 800W Peak, Displacement Limited                     |
| Recommended Amplifier Power | 100W - 600W (FTC)   |
| Rated Impedance             | 8 Ω   |
| Input Connectors            | 24" Pigtail with Waterproof Wire Nuts                         |
| Enclosure                   | Composite Roto-Mold   |
| Mounting Options            | In-Ground, Recommended Depth 13" (5.12cm) to 17" (6.7cm)      |
| Dimensions (H x W x D)      | 24.17" x 12.8" x 12.8"   61.4cm x 32.5cm x 32.5cm             |
| Weight, Net/Shipping        | 25.6lbs   11.6kg / 38.5lbs   17.5kg                           |
| Warranty                    | Limited 3-Year Warranty                                       |